
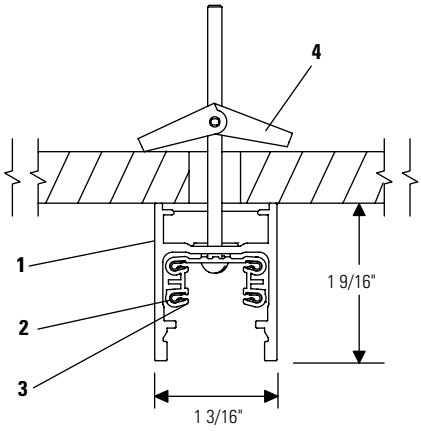


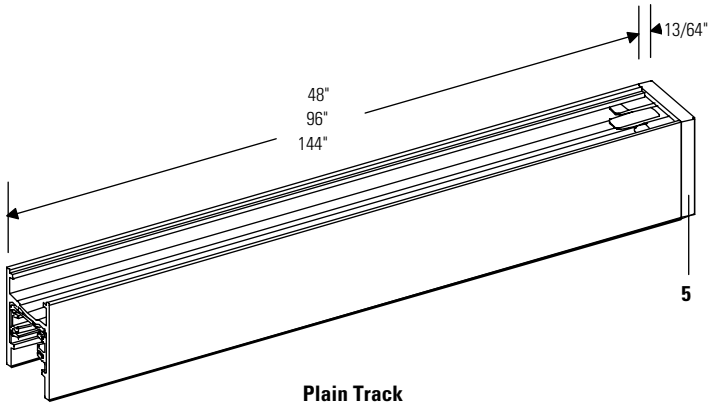

Plain Track

Catalog No.

Finishes	Plain Track		
	4'	**8'**	**12'**
Matte White	**37004WH**	**37008WH**	**37012WH**
Matte Black	**37004BK**	**37008BK**	**37012BK**

Features

1. **Track:** 6063T-5 structural aluminum extrusion; average wall thickness .08.
2. **Conductors:** "U" shaped copper conductor, increases contact surface area minimizes contact resistance provides reliable positive connection.
3. **Insulated liner:** .040" wall, high temperature extruded thermoplastic.
4. **Toggle Bolts and Screws:** furnished with track unit.
5. **Dead End Cap:** molded thermoplastic.

Mechanical

Track units plug together and lock securely to prevent accidental separation. ProSpec™ track fixtures can be attached at any point along the track. Track units may be field cut.

Electrical

(2) circuits. Each circuit is 277V, 60Hz, 20 AMP compatible. Each circuit has dedicated neutral for maximum control flexibility. Track units are continuously grounded throughout. Electrical conductors are concealed in an insulated liner in the track. Intended for wiring to branch circuit building wire with ground, in accordance with National and local codes.

Finish

All painted finishes are baked enamel.

Label

cUL, I.B.E.W.; Patent Pending

Job Information **Type:**

Job Name:

Cat. No.:

Lamp(s):

Notes:


631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
www.lightolier.com © 2008 Philips Group • A1008

Track Mounting and Power Feed Systems

Track Mounting Clips


3/8" Standoff Clips, order separately. Recommended 2 clips per 4', 3 clips per 8', 4 clips per 12' track units. Use additional clips for more support in high load applications. Toggle bolts are included.
Not recommended for wall mounting.

26478WH Matte White (4) per pack.
26478BK Matte Black (4) per pack.



Direct Mounting


Mount through existing holes in track. Top of track sits flush to ceiling.
Recommended for wall and ceiling mounting.

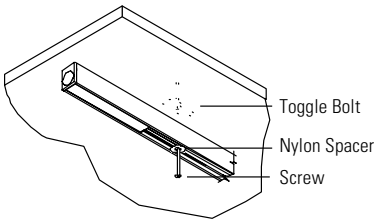

1/16" Flush Mount Clips

Nylon coated spring steel. Spaces track 1/16" from ceiling. Recommended 2 per 4', 3 per 8', and 4 per 12' track sections. Use additional clips for more support when track is heavily loaded. Clips may be ordered separated.
Not recommended for wall mounting.


56451WH Matte White (set of 10)
56451BK Matte BK (set of 10)




Grid Ceiling Mounting Clips

Square Edge Panels and 9/16" - 15/16" T-Bars Clip is supplied assembled. Mounts easily onto T-Bars by rotating clips. Use two per 4' track, three per 8' and 12" track.

6089 (9) Clips







Regressed Edge Panels

9/16" - 15/16" T-Bars
Clips or supplied assembled. Mounts easily onto T-Bars by rotating clips. Use two per 4' track, three per 8' and 12' track.

6087 (9) Clips

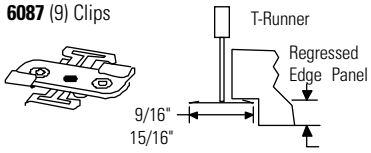


6088 (9) Clips

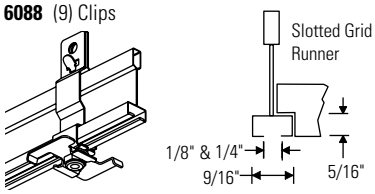

Grid Ceiling Canopy Kit (End & Floating)


For mounting the track to grid suspended ceilings. Mounts to ceiling types shown above using clips 6087, 6088, or 6089 which are ordered separately. Includes a special outlet box to fit onto runners. Power can be fed to Feed Track, Live End, "L", "T", "X", In-Line connectors and Powertrip canopy version. Mounts along runner or at the intersection of runners.

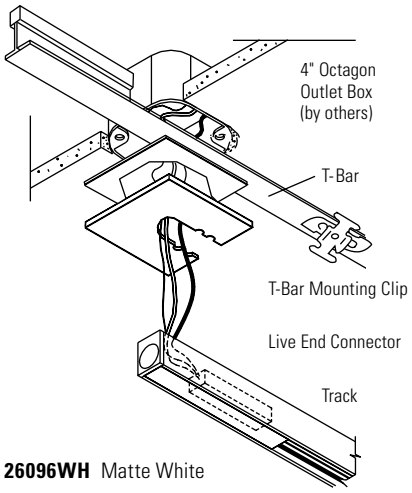

26096WH Matte White

Surface Canopy Kit (End)

Canopy can be mounted directly over the live end, in-line, 'L', 'T', and 'X' connectors. Canopy also can be positioned anywhere on the track up to 4' from edge of the track extrusion (floating feed, wire cover included). Power can be fed into live end and Powertrip only utilizing the floating feed option. Canopy mounts to a 4" octagonal outlet box. Use 1/16" flush mounting clips (supplied with track) or direct mount to ceiling or wall.

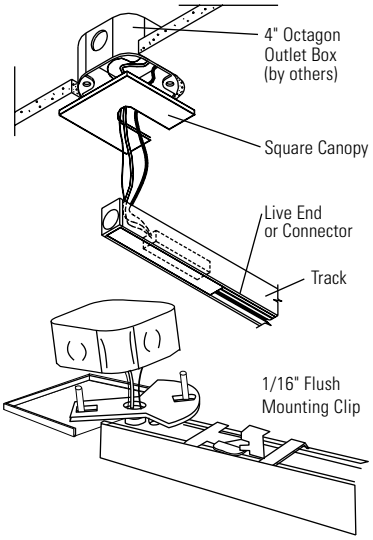


26060WH Matte White
26060BK Matte Black

Standoff Canopy Kit (End)

For use with 26478WH, BK 3/8" standoff mounting clips (ordered separately). Canopy can be mounted directly over the live end, in-line, 'L', 'T', and 'X' connectors. Canopy also can be positioned anywhere on the track up to 4' from edge of the track extrusion (floating feed, wire cover included). Power can be fed into live end and Powertrip only utilizing the floating feed option. Canopy mounts to a 4" octagonal outlet box. Use 1/16" flush mounting clips (supplied with track) or direct mount to ceiling or wall.

26061WH Matte White
26061BK Matte Black

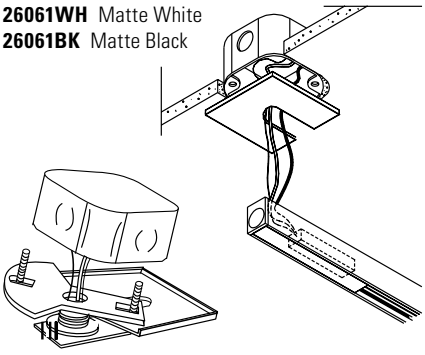

Job Information **Type:**


631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
www.lightolier.com © 2008 Philips Group • A1008

Track Mounting and Power Feed Systems

Stem Mounting Kits

Mounts to a 4" Octagon outlet box or surface. Use two per 4' track, three per 8' and 12' track. When making a run of track do not exceed 4' between stems. Use additional stems for additional support.Can feed live end only. 8ft maximum length of suspension. Stem can be field cut. *Not recommended for wall mounting.*


	18" Stem	48" Stem
Actual length for ceiling to top of track:	17 3/8"	47 3/8"
Matte White	**7584**	**7586**
Matte Black	**7683**	**7681**

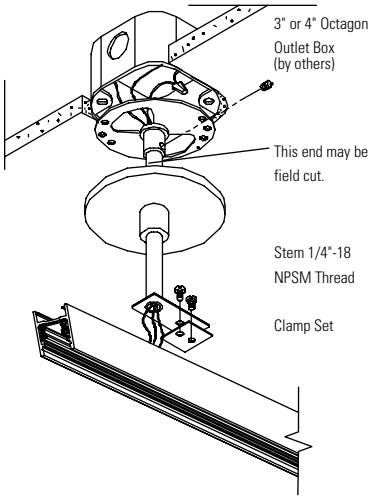

Swivel Stem Mounting Kits

Adjusts from 0° to 90°. Can be field cut. 48" stem. 8' maximum length of suspension. Can feed live end only. Stem can be field cut.


7480 Matte White
7481 Matte Black

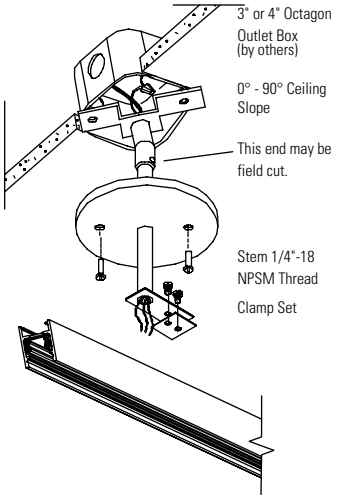

Stem Extension Kit


Mounts to any system kit to extend its length to 48". *Cannot be field cut.*

7582 Matte White
7680 Matte Black

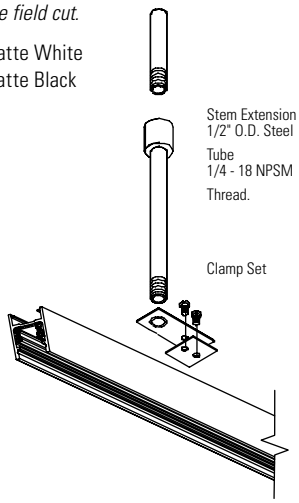

Powerfeed Cord 10'

To be used with stems or cables. (3) 12ga wires and (1) 12ga ground. Fiber glass jacket white or black. Can be field shortened. Not a mechanical support. Can feed into all connectors.




37310WH White
37310BK Black

Cable Suspension Kit

Maximum distance between suspension cables is 8ft.

37205 Black/White
37210 Black/White
37220 Black/White




Cable Power Feed for Suspended Mounting

(3) 12ga wires and (1) 12ga ground. Fiber glass jacket white or black. Can be field shortened. Can feed into all connectors.

37005WH/BK ProSpec 277V, 2 Circuit, 20A Power Feed for Suspended Mtg. 5', White/Black

37010WH/BK ProSpec 277V, 2 Circuit, 20A Power Feed for Suspended Mtg. 10', White/Black


37015WH/BK ProSpec 277V, 2 Circuit, 20A Power Feed for Suspended Mtg. 20', White/Black




Live End Feed Connector (Live End)

Feeds power at either end of track. Not polarized. Can be fed directly from surface or from ceiling using a 3/8" or 1/2" electrical connector (by others).


37046WH Matte White
37046BK Matte Black

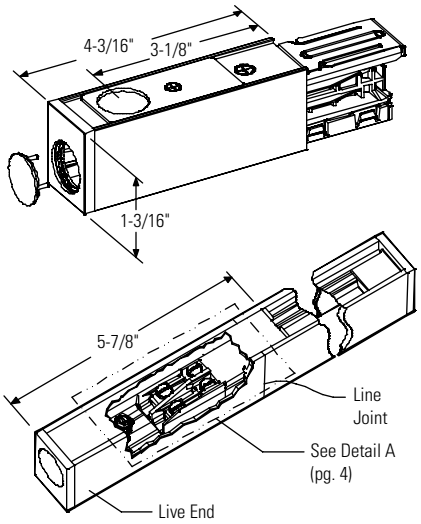

Over Beam or Through Beam

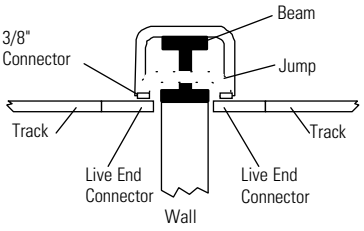

Through Wall or Column

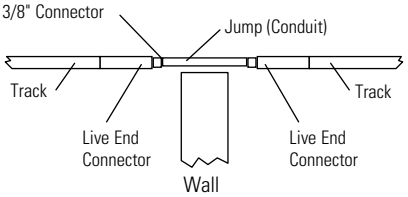

Job Information **Type:**

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
www.lightolier.com © 2008 Philips Group • A1008


Feed Connections for Surface, Cable and Stem Mounted Patterns

All connectors can be fed directly from above using a 3/8" or 1/2" electrical connector (by others).

"L" Connector

The "L" connector is pre-wired. Not polarized.


37050WH Matte White
37050BK Matte Black

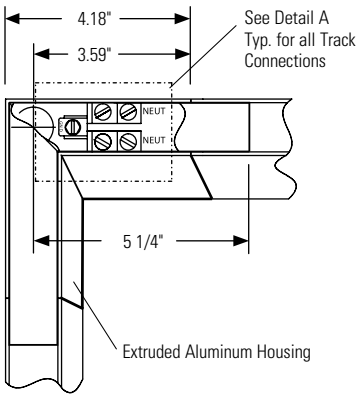

"T" Connector

The "T" connector is not pre-wired or polarized. Used to make "T" pattern with track. 12ga. copper jumper wires supplied to make all necessary connections.


37051WH Matte White
37051BK Matte Black

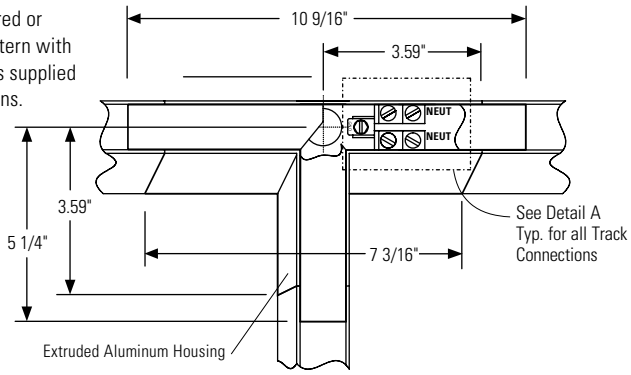

"X" Connector

The "X" connector is not pre-wired. Used to make "X" pattern with track. 12ga. copper jumper wires supplied to make all necessary connections. Not polarized.


37052WH Matte White
37052BK Matte Black

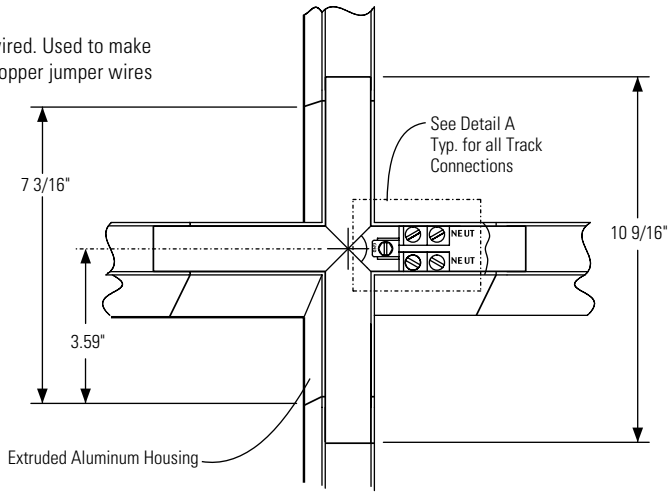

In-Line Connector

Permits power feed-in between track units in a straight run of track. The "In-Line" connector is pre-wired. Not polarized.


37054WH Matte White
37054BK Matte Black

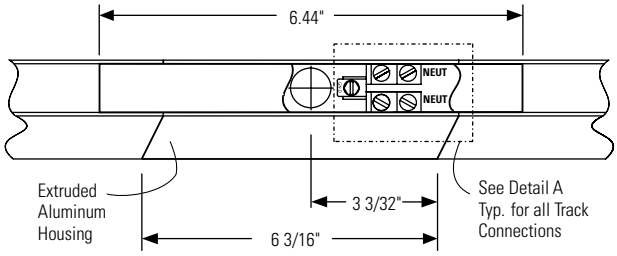

Invisible Coupler


Used to connect two pieces of track together mechanically and electrically. Power cannot be feed into the mini-coupler.

37049WH Matte White
37049BK Matte Black

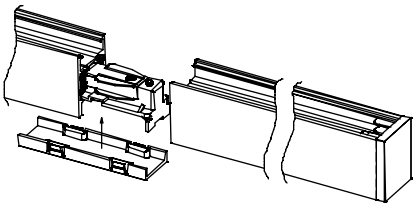

Detail A

Use 12ga. solid copper wire for feed connections including ground.



Job Information **Type:**

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
www.lightolier.com © 2008 Philips Group • A1008